

# **VHD5** Amplifiers

# **User Guide**

· VHD5000 · VHD5000S · VHD5100



# The Future of Sound. Made Perfectly Clear.

At KV2 Audio our vision is to constantly develop technologies that eliminate distortion and loss of information providing a true dynamic representation of the source.

Our aim is to create audio products that absorb you, place you within the performance and deliver a listening experience beyond expectations.

# VHD5 Amplifiers · Important Safety Instructions



To indicate that caution is necessary when operating the device or control close to where the symbol is placed, or to indicate that the current situation needs operator awareness or operator action in order to avoid undesirable consequences.

This device is not suitable for use in places where children may be present.

#### **Important Safety Instructions**

Before using your VHD5 Amplifiers, be sure to carefully read the applicable items of these operating instructions and the safety suggestions.

- 1. Read all product instructions.
- 2. Keep printed instructions, do not throw away.
- 3. Respect and rewiew all warnings.
- 4. Follow all instructions.
- 5. Do not use this unit near water, in unprotected outdoor areas or in rain or wet conditions.
- 6. Clean only with dry cloth.
- 7. Do not block any ventilation openings.
- 8. Install in accordance with KV2 Audio's recommended installation instructions.
- 9. Do not install near any heat sources such as heat radiators, heat registers, stoves or other apparatus that produce heat.
- 10. Do not defeat the safety purpose of the grounding type. A grounding type plug has two blades and a third grounding connector. The third connector is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 11. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles.

  The AC mains plug or appliance coupler shall remain readily accessible for operation.
- 12. Only use accessories specified by KV2 Audio.
- 13. Install the product only with rigging specified by KV2 Audio, or sold with the amplifier.
- 14. Unplug this loudspeaker during lightning storms or when unused for long periods of time.
- 15. Refer all servicing to qualified service personnel. Servicing is required when the amplifier has been damaged in any way, such as when the power-supply cord or plug has been damaged; liquid has been spilled or objects have fallen into the amplifier; rain or moisture has entered the amplifier; the amplifier has been dropped; or when for undetermined reasons the amplifier does not operate normally.
- 16. Do not remove front or back panels. Removal of the panel will expose hazardous voltages. There are no user serviceable parts inside and removable may void the warranty.
- 17. An experienced user shall always supervise this professional audio equipment.

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE THE PANELS. NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED PERSONNEL.

**WARNING:** To prevent fire or electric shock, do not expose this equipment to rain or moisture.

#### SAFETY SUMMARY

To reduce the risk of electric shock, disconnect the amplifier from the AC mains before installing audio cable. Reconnect the power cord only after making all signal connections. Connect the amplifier to a twopole, three- wire grounding mains receptacle. The receptacle must be connected to a fuse or circuit breaker. Connection to any other type of receptacle poses a shock hazard and may violate local electrical codes. Do not allow water or any foreign object to get inside the amplifier. Do not put objects containing liquid on or near the unit. To reduce the risk of overheating the amplifier, avoid exposing it to direct sunlight. Do not install the unit near heat-emitting appliances, such as a room heater or stove. This amplifier contains potentially hazardous voltages. Do not attempt to disassemble the unit. The unit contains no user serviceable parts, repairs should be performed only by factory trained service personnel.



# Contents

VHD5000 · VHD5000S · VHD5100 · Introduction	3
VHD5000	4
Introduction	4
Getting started	5
Features - Front panel	6
Features - Rear panel	7 - 8
Drawing	9
Specifications	10
Block Diagram	11
VHD5000S	12
Introduction	12
Getting started	13
Features - Front panel	14
Features - Rear panel	15
Drawing	16
Specifications	17
Block Diagram	18
VHD5100	19
Introduction	19
Getting started	20
Features - Front panel	21
Features - Rear panel	22
Drawing	23
Using the System	24 - 25
Specifications	26
Block Diagram	27 - 28
VHD5 Power Unit	29
Front Panel	29
Rear Panel	30
Wiring Scheme	31 - 32
Basic configuration	33
Warranty · Service	34
Notes	35 - 36





VHD5000 - part number KVV 987 334 (230V) VHD5000S - part number KVV 987 356 (230V) VHD5100 - part number KVV 987 438 (230V)

#### Introduction

The VHD5000 with adjacent VHD5000S and VHD5 Power Unit is a control and amplification system for processing and powering one VHD5.0 Mid-High enclosure and three VHD8.10 Low/Mid enclosures. It also houses all processing and control electronics for the associated downfill and subwoofer systems. The VHD5 Power Unit provides Electrical power distribution for amplifiers and control for the motorized VHD5 Flybar system. The VHD5 system may be extended by adding the VHD5100, two channel downfill / fill amplifier.

The VHD5000 contains separate Hi-frequency amplifiers, one for the single HF driver and a second amplifier for the double HF drivers and a Mid-frequency amplifier. The VHD5000S contains two Low/Mid amplifiers.

The VHD5000 unit features Class AB mosfet amplifier topology, with transformer-balanced outputs and high efficiency, high power bandwidth for the high frequencies, whilst the mid amplifier is a hybrid high efficiency, high power bandwidth amplifier. The VHD5000S unit features two low frequency, high efficiency, high current delivery amplifiers.

The VHD5100 unit features 2 channel three-way, active control and amplification systems. The Downfill channel is specially designed for the VHD5.1 downfill speaker and the Fill channel powers a single ESR215Mkll speaker.

The VHD5 amplifiers feature automatic - switchable transformer power supplies for high efficiency power and better utilization of the available power network, to deliver maximum current for the amplifiers.

The VHD5 amplifier unit provides complete audio system control including equalisation, overdrive protection, thermal protection and user adjustable set-up parameters.

The Amplifier incorporates a graphic, 5.7" sunlight readable touch control panel for easy setup and global overview over all systems, with Ethernet remote control possibility. The VHD5000 amplifier can be remotely controlled via standard Ethernet networks using a web interface. The VHD5000S amplifier is interconnected to the VHD5000 for remote control possibility and amplifier status overview.

System setup provides control of: input level (-20/+3dB), amplifier levels, Low (-6/+6dB, Hi -6/+4dB), 2 x subwoofer levels, (-20/+10dB) and downfill signal output levels, (-54/+6dB), individual mutes, long distance equalization, high frequency recovery frequency and level. Audio signal delays may be applied separately on the overall system, fill and subwoofers.

The VHD5000 amplifier provides information of speaker output status, (OK, disconnected, overloaded) and temperature status.

The VHD5000 is "Line Driver Ready" and has its own input impedance selector to accurately match-up the input impedance to the output of any mixer used. In most cases it would be advisable to use a VHD LD4 line driver in addition at the mixer outputs to ensure that the line to the amplifier is driven correctly and the signal integrity maintained.

The VHD5 amplifiers are actively cooled, air is drawn into the front of the amplifier by the two fans on the rear panel, this passes over the cooling fins of the heat sinks and exhausts through the rear.





VHD5000 - part number KVV 987 334 (230V)

#### **Application**

Specifically designed as the amplification and control for the 1xMid/Hi VHD5.0 part loudspeaker systems with adjacent VHD5000S in a rack mount module

- · Large scale Portable PA
- Fixed installations
- Large clubs

#### Introduction

Active control and amplification unit specifically designed in conjunction with VHD5000S for powering the VHD5 loudspeaker system. The VHD5000 is equipped with many features for easy large scale speaker system use. It features all signal processing, crossover and speaker system protection. All signal processing is executed with KV2 Audio Super Audio Analog circuitry and utilizes KV2's industry leading 20MHz sampling, for on board time alignment and phase correction for maximum audio quality. The VHD5000 is equipped with multiple delay lines, wide-band delay line for VHD5 system delay, fill output delay and two low frequency delay lines for subwoofers.

The Main input, fill output and subwoofer outputs are equipped with phase reverse and set level features.

The VHD5000 input is "Line Driver Ready", it has an input signal impedance selector switch, (10kOhm and 120Ohm) to match up low impedance signal source when driving long signal cables. In most cases it would be advisable to use a VHD LD4 Line Driver in addition at the mixer outputs, to ensure that the line to the amplifier is driven correctly and the signal integrity maintained.

The VHD5000 also features long distance eq, high frequency recovery and a signal generator. The amplifier is equipped with multiple network possibilities for easy remote control operation from networked amplifiers or website applications.


#### The amplifier compliment inside the VHD5000 is as follows:

High Frequency 1 - 300-watt, Class AB Push-Pull low IM Mosfet design with transformer balanced output.

High Frequency 2 - 600-watt, High Efficiency, High power bandwidth, low intermodulation design.

Mid Frequency - 1500-watt, High Efficiency, High Power Bandwidth, low intermodulation design.

#### Front Panel:



FOR YOUR SAFETY, READ THE IMPORTANT PRECAUTIONS SECTION AS WELL AS THE INPUT, OUTPUT AND POWER CONNECTION SECTIONS OF THIS MANUAL.

# Rear view: 437.3

# 

# VHD5000 · Getting started





To indicate that caution is necessary when operating the device or control close to where the symbol is placed, or to indicate that the current situation needs operator awareness or operator action in order to avoid undesirable consequences.

This device is not suitable for use in places where children may be present.

#### **Rack Mounting**

VHD5000 will mount in standard 19" rack systems. Integral rear mounting rack ears are also provided for additional support, DO NOT rely on fixing and mounting the amplifiers using just the front panel as support. Use eight screws and washers to mount the amplifier to the equipment rack rails (four for the front and four for the rear).

We recommend using a shock mounted rack for touring use to prolong the life of your VHD5000 amplifiers.

#### Cooling

The VHD5000 amplifier is cooled with two shock mounted fans, that moves air from the front panel through dust filters across the heat-sinks and exhausts through the rear.

Although this unit is simple to operate, improper use can be dangerous. This is a very high-powered device that can put out high voltages and sizeable currents.

It is important to have an adequate air supply at the front of the amplifier, and enough space around the rear of the amplifier to allow the cooling air to escape. If the unit is rack mounted, do not use doors or covers on the rear of the rack; the exhaust air must flow without restriction. If you are using racks with closed backs, use fans on the rear rack panel to ensure an ample air supply.

#### **AC Requirements**

A single PowerCon 32A cable is provided to connect the VHD5000 to a suitable AC power supply.

The PowerCon 32A is a connector without breaking capacity, i.e. the PowerCon should not be connected or disconnected under load or while it is live.

Always isolate your AC supply before disconnecting the PowerCon connector. The VHD5000 amplifiers features switchable power supply which automatically adapts for the input voltage in range from 195 to 260V AC.


AC Input	Current draw with amplifier running at Average Power (Each Channel)	Current draw with amplifier running at Peak Power (Each Channel)
200V	15A	25A
230V	13A	24A
250V	12A	23A

Remember that if you are connecting both AC cables for the VHD5000 to the same AC power source then you will need to have double the per channel current available.

# VHD5000 · Features · Front panel



#### Front Panel

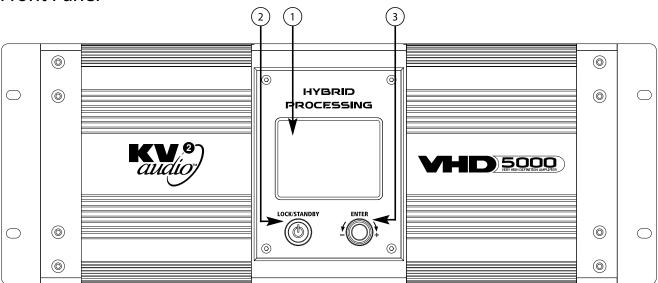

#### 1) Sun readable touch screen display

Serves for user friendly setup of all functions of the VHD5000 and adjacent VHD5000S and VHD5 Power Unit with flybar. You can easily set levels, time delays, filters, network setups and memories. The same settings can be set using network control. Please refer to the VHD5000 software User Guide for more information.

#### 2) Lock / Standby


This illuminated pushbutton serves for setup lock or for standby mode when long pressed. This pushbutton is green in normal power-on state and illuminates red when standby mode is activated.

#### 3) + / - Enter

The Rotation encoder with Enter push button. The encoder serves as the main way for increasing (clockwise), or decreasing (counterclockwise) values and menu positions. The encoder also serves as the ENTER button, allowing the operator to enter/leave the sub-menu within the main menus.

# VHD5000 · Features · Rear panel



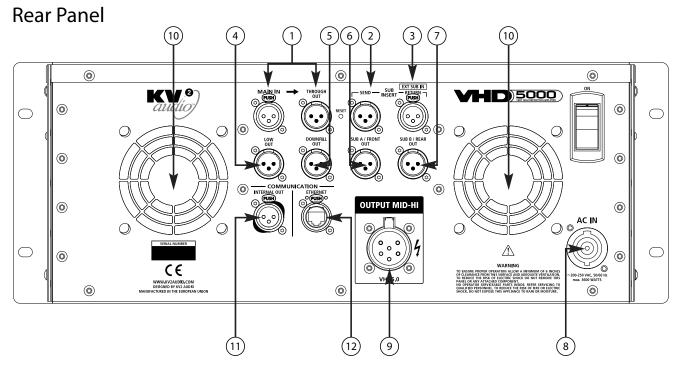

#### SIGNAL INPUTS, OUTPUTS

#### 1) Main Input / Through Signal Out

This is the main system input connector with associated 'Through Signal Output' connector for sending unprocessed signal to other devices, such as fills or other VHD5000 amplifiers. The input impedance is switchable between  $10k\Omega$  and  $120\Omega$  on the display panel or remote control, the  $120\Omega$  should be selected when the VH5000 is driven from a line driver. Where the VHD5000 is driven from a standard mixing console output, then the  $10k\Omega$  setting should be used.

#### 2) Sub Low Insert Send

Sub Insert send is used when the insert function is active, when Insert is not activated, no signal is present at this output. Insert function serves for sub and low bands only and does not affect the audio quality of mid and hi band using other devices. This insert is typically used for master equalization and resonance reduction.

#### 3) Sub Low Insert Return / Ext. Sub In

This Insert Return is combined with Ext. Sub Input. When Insert is activated, this input serves as a low/mid Insert input. When the External Sub Input is activated this input serves as External Sub Input. Refer to the block diagram for more information.

#### 4) Low Out

Serves as a low-mid signal output for the adjacent VHD5000S amplifier.

#### 5) Fill Out

This serves as a fill signal output, with the possibility of tunable HPF and delay.

#### 6) Sub A / Front Out

Subwoofer A signal output provides processed outputs for feeding various subwoofers. When the cardioid mode is set, it then serves as an output for the front subwoofer.

#### 7) Sub B / Rear Out

Subwoofer B signal output provides processed outputs for feeding various subwoofers. When the cardioid mode is set, then it serves as an output for the rear subwoofer.

# VHD5000 · Features · Rear panel



#### **POWER INPUT, OUTPUTS**

#### 8) PowerCon Power Connector

Accepts a standard PowerCon 32A terminated AC cable.

#### 9) Output Mid/Hi

VHD5.0 AP6 Connector, accepts a standard AP6 terminated loudspeaker cable for connecting up to a single VHD5.0 cabinet. We recommend using minimum 2.5 mm/core cables.

#### 10) Fans

The cooling fans operate continuously while the VHD5000 is on. An internal temperature sensor increases the speed of the fans during high temperature conditions. Air enters through the front panel dust filters and exits through the rear. Be sure to allow adequate air flow to the front of the rack in which the VHD5000 is mounted.

#### **COMMUNICATION**

#### 11) Internal Out

Serves as a internal communication signal output for the adjacent VHD5000S amplifier and Power rack unit. Serves for remote control of adjacent devices.

#### 12) Ethernet

Serves as a external communication port supporting Ethernet standard, accepts RJ45, T-658B wiring.




# Drawing








0


454.9








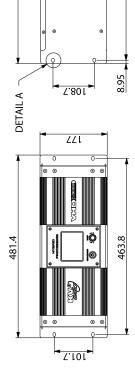





VHD5000 · Drawing

# $VHD5000 \cdot Specifications$



#### **Specifications**

Output	Cita	111110	=13
Number	of C	han	ne

1 x VHD5.0

Туре	Class AB Push-Pull low IM Mosfet design, transformer balanced output
Rated Continuous Power	300W
Distortion	< 0.02%
Operating Bandwidth	2kHz to 30kHz

#### **High Frequency Amplifier 2 Specification**

Туре	High Efficiency, High Power bandwidth
Rated Continuous Power	600W
Distortion	< 0.05%
Operating Bandwidth	2kHz to 30kHz

#### **Mid Frequency Amplifier Specification**

Туре	High Efficiency, High Power bandwidth
Rated Continuous Power	1500W
Distortion	< 0.05%
Operating Bandwidth	450Hz to 2kHz

#### **Signal Input**

Input Channels	XLR
Input Sensitivity	1.55V RMS
Input Impedance	$10k\Omega$ to $120\Omega$ "Line driver ready"

#### **Signal Output**

Output channels	Through, Low, Sub A B, Fill, Insert
Output Chamileis	Tillough, Low, Jub A b, Till, Ilisei

#### **Speaker Output**

Speaker Ou	tput	AP6

#### **Features**

Input Level Control	-20/ +3dB
Hi Level Control	-6/ +4dB
Mid Level Control	fixed
Low Level Control	-6/ +6dB
Subwoofer Level Control	-20/ +10dB
Downfill Level Control	-54/ +6dB
Indicators	5.7" sunlight readable color display
Remote control	Ethernet


#### **Power Requirements**

Power Connector	1x Neutrik PowerCon® 32A
Operating Voltage	230V
Operating Voltage Range	195 to 260V AC
Recommended Amperage	20A 205V   16A 230V
Soft Start	YES
Protection	Thermal breaker
Cooling	Front-to-back, active

#### **Physical Dimensions**

i ilysicai Dilliensions	
Height	177.8 mm (7.0"), 4RU
Width	481.4 mm (18.95")
Depth	495 mm (19.5")
Weight	36 kg (80lbs)

#### **Block Diagram**

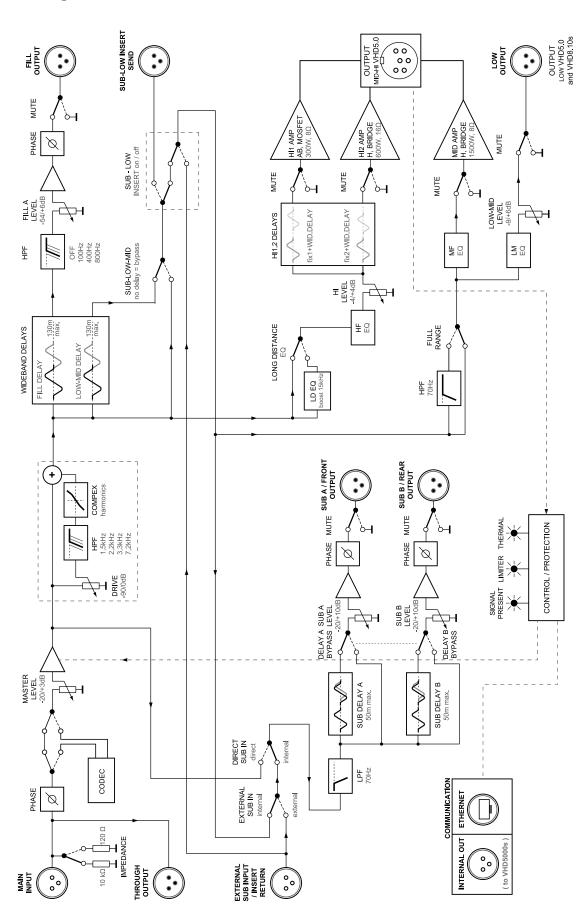

VHD5000 · Block Diagram





VHD5000S - part number KVV 987 356 (230V)

#### **Application**


Specifically designed as the amplification and control unit for powering the 1xLow/Mid VHD5.0 part and 3xVHD8.10 loudspeakers in a rack mount module

- · Large scale Portable PA
- Fixed installations
- · Large clubs


#### Introduction

The VHD5000S is a rack mounted, high efficiency, low/mid amplifier, specifically designed in conjunction with the VHD5000 for powering the VHD5 low/mid loudspeaker system. The unit contains two separate 2500 watt amplifiers with individual power supplies, signal paths and inputs and outputs within a single four rack space chassis. The unit acts as a slave for the VHD5000, which provides audio and control signal.

#### Front Panel:




Rear view:



FOR YOUR SAFETY, READ THE IMPORTANT PRECAUTIONS SECTION AS WELL AS THE INPUT, OUTPUT AND POWER CONNECTION SECTIONS OF THIS MANUAL.

Side view:



# VHD5000S · Getting started





To indicate that caution is necessary when operating the device or control close to where the symbol is placed, or to indicate that the current situation needs operator awareness or operator action in order to avoid undesirable consequences.

This device is not suitable for use in places where children may be present.

#### **Rack Mounting**

VHD5000S will mount in standard 19" rack systems. Integral rear mounting rack ears are also provided for additional support, DO NOT rely on fixing and mounting the amplifiers using just the front panel as support. Use eight screws and washers to mount the amplifier to the equipment rack rails (four for the front and four for the rear).

We recommend using a shock mounted rack for touring use to prolong the life of your VHD5000S amplifiers.

#### Cooling

The VHD5000S amplifier is cooled with two shock mounted fans, that moves air from front panel through dust filters across the heat-sinks and exhausts through the rear.

Although this unit is simple to operate, improper use can be dangerous. This is a very high-powered device that can put out high voltages and sizeable currents.

It is important to have an adequate air supply at the front of the amplifier, and enough space around the rear of the amplifier to allow the cooling air to escape. If the unit is rack mounted, do not use doors or covers on the rear of the rack; the exhaust air must flow without restriction. If you are using racks with closed backs, use fans on the rear rack panel to ensure an ample air supply.

#### **AC Requirements**

Two PowerCon 32A cables are provided to connect the VHD5000S to a suitable AC power supply.

The PowerCon 32A is a connector without breaking capacity, i.e. the PowerCon should not be connected or disconnected under load or while it is live.

Always isolate your AC supply before disconnecting the PowerCon connector. The VHD5000S amplifiers features switchable power supply which automatically adapts for the input voltage in range from 195 to 260V AC.


AC Input	Current draw with amplifier running at Average Power (Each Channel)	Current draw with amplifier running at Peak Power (Each Channel)
200V	15A	25A
230V	13A	24A
250V	12A	23A

Remember that if you are connecting both AC cables for the VHD5000S to the same AC power source then you will need to have double the per channel current available.

# VHD5000S · Features · Front panel



#### Front Panel

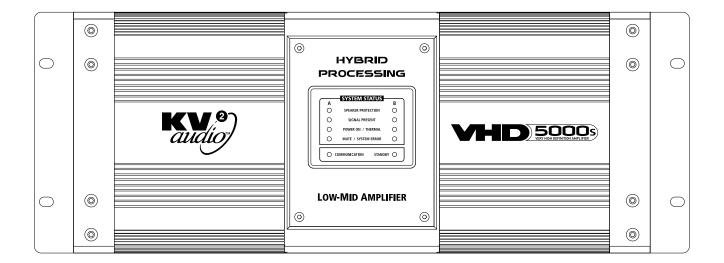

#### 1) Speaker Protection

These yellow LED's indicate when the audio speaker protection limiter has been activated for that particular channel of the amplifier.

#### 2) Signal Present

These green LED's indicate when signal is present at the Input to that particular channel of the amplifier.

#### 3) Power On / Thermal

These are dual colour LED's. When green they indicate that the Power Switch is On and that channel of the amplifier is powered up. When red they indicate that that channel has overheated and shut down. The unit will Auto Reset after it cools down to a safe operating temperature.

#### 4) Mute / System error


These red LED's indicate when the amplifier detects any fault or error. More information can be found using display or remote control software.

#### 5) Communication

The green LED indicates successful communication with the adjacent VHD5000 amplifier.

#### 6) Standby

The yellow LED indicates when the amplifier is switched into standby mode. Standby mode is activated via the VHD5000 amplifier.

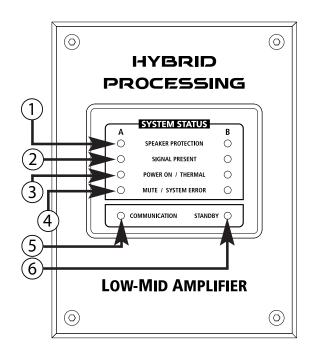

# VHD5000S · Features · Rear panel



# Rear Panel 2 4 3 1 5 1 4 2 COMMUNICATION DITERNAL IN OUTPUT LOW A IN OUTPUT LOW B IN OUTPUT LOW B OUTPUT L

#### **SIGNAL INPUTS, OUTPUTS**

#### 1) Low A In / Low B In / Through Signal Out

CE

This is the low frequency signal input connector with associated 'Through Signal Output' connector for sending unprocessed signal to other devices, such as another VHD5000s. Low B In / Through Signal Out is identical to channel A.

#### **POWER INPUT, OUTPUTS**

#### 2) PowerCon Power Connector

Accepts a standard PowerCon 32A terminated AC cable.

#### 3) Output Low A

VHD8.10 AP4 Connector, accepts a standard AP4 terminated loudspeaker cable for connecting either a single VHD5.0 with one further VHD8.10 cabinet or two VHD8.10 cabinets together. We recommend using minimum 2.5 mm/core cables. Output Low B is identical to Output A.

#### 4) Fans

The cooling fans operate continuously while the VHD5000S is on. An internal temperature sensor increases the speed of the fans during high temperature conditions. Air enters through the front panel dust filters and exits through the rear. Be sure to allow adequate air flow to the front of the rack in which the VHD5000S is mounted.


#### **COMMUNICATION**

#### 5) Internal Out

Serves as a internal communication signal output for the adjacent VHD5000S amplifier and Power rack unit. Serves for remote control of adjacent devices.



# Drawing

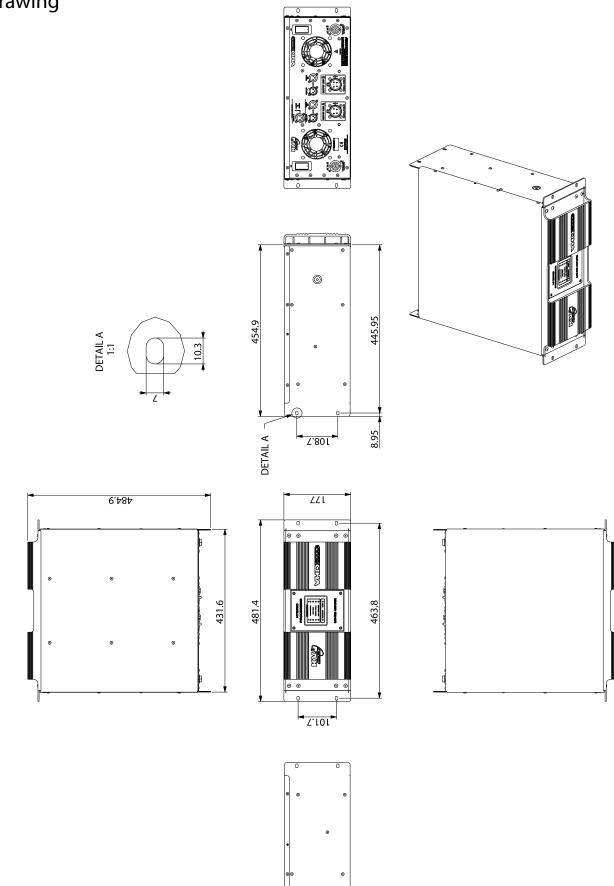

VHD5000S · Drawing

# VHD5000S · Specifications



# Specifications


Weight


Number of Channels	2	
Mid-Bass Frequency Amplifier Specification		
Туре	High efficiency, Current-Enhancing, Switched-Rail Amplifier	
Rated Continuous Power	2500W	
Min. Load Impedance	2Ω	
Distortion	<0.05%	
Operating Bandwidth	20Hz to 450Hz	
Signal Input		
Input Channels	XLR	
Input Sensitivity	1.55V RMS	
Input Impedance	10kΩ	
Signal Output		
Output channels	Through Out	
Speaker Output		
Speaker Output	2x AP4	
Features		
Indicators	2x Power ON/Thermal, Signal/Limiter/Communication	
Remote control	Ethernet	
Power Requirements		
Power Connector	2x Neutrik PowerCon® 32A	
Operating Voltage	230V	
Operating Voltage Range	195 to 260V AC	
Recommended Amperage	2x20A 205V   2x16A 230V	
Soft Start	YES	
Protection	Thermal breaker	
Cooling	Front-to-back, active	
Physical Dimensions		
Height	177.8 mm (7.0"), 4RU	
Width	481.4 mm (18.95")	
Depth	495 mm (19.5")	

42 kg (92.6lbs)



#### **Block Diagram**

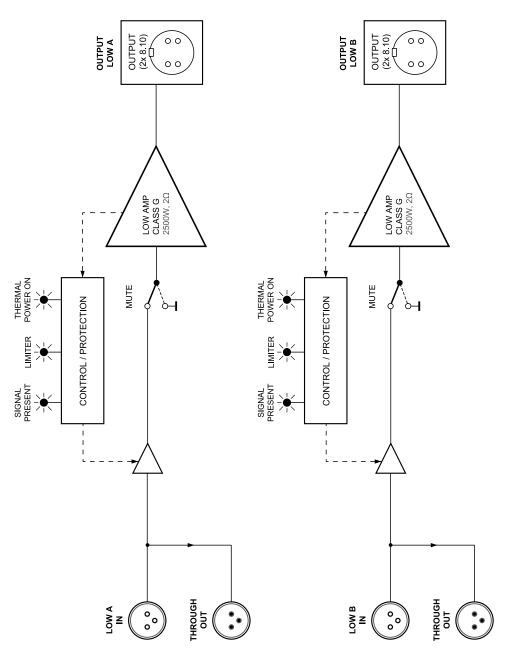



VHD5000 S · Block Diagram





VHD5100 - part number KVV 987 438 (230V)

#### **Application**

Specifially designed as the amplifiation and control unit for powering the 1x VHD5.1 Downfill and 1x ESR215Mkll as a general use Fill module


- · Large scale Portable PA
- Fixed installations
- · Large clubs

#### Introduction

The VHD5100 is a two channel, three-way, active control and amplification system specially designed for the KV2 Audio VHD5.1 Downfill and ESR215MkII loudspeaker system. It houses all signal processing and amplification, as well as providing control and crossover function if needed utilizing a Fill channel external subwoofer.


Each channel incorporates three amplifiers consisting of 100-watt, Class AB, push pull, low intermodulation amplifier for high frequencies, 200-watt, Class AB, push pull, low intermodulation design for mids and a 1000-watt, high-efficiency, current- enhancing switch mode technology amplifier for bass.

#### Front Panel:




FOR YOUR SAFETY, READ THE IMPORTANT PRECAUTIONS SECTION AS WELL AS THE INPUT, OUTPUT AND POWER CONNECTION SECTIONS OF THIS MANUAL.

#### Rear view:



#### Side view:



# VHD5100 · Getting started





To indicate that caution is necessary when operating the device or control close to where the symbol is placed, or to indicate that the current situation needs operator awareness or operator action in order to avoid undesirable consequences.

This device is not suitable for use in places where children may be present.

#### **Rack Mounting**

VHD5100 will mount in standard 19" rack systems. Integral rear mounting rack ears are also provided for additional support, DO NOT rely on fixing and mounting the amplifiers using just the front panel as support. Use eight screws and washers to mount the amplifier to the equipment rack rails (four for the front and four for the rear).

We recommend using a shock mounted rack for touring use to prolong the life of your VHD5100 amplifiers.

#### Cooling

The VHD5100 amplifier is cooled with two shock mounted fans, that moves air from front panel through dust filters across the heat-sinks and exhausts through the rear.

Although this unit is simple to operate, improper use can be dangerous. This is a very high-powered device that can put out high voltages and sizeable currents.

It is important to have an adequate air supply at the front of the amplifier, and enough space around the rear of the amplifier to allow the cooling air to escape. If the unit is rack mounted, do not use doors or covers on the rear of the rack; the exhaust air must flow without restriction. If you are using racks with closed backs, use fans on the rear rack panel to ensure an ample air supply.

#### **AC Requirements**

Two PowerCon cables are provided to connect the VHD5100 Amplifier to a suitable AC power supplies. Each cable powers each separate amplifier channel for sufficient current delivery.

#### THE VHD5100 REQUIRES A GROUND CONNECTION. ALWAYS USE A GROUNDED OUTLET AND PLUG.

The PowerCon is a connector without breaking capacity, i.e. the PowerCon should not be connected or disconnected under load or while it is live. Always isolate your AC supply before disconnecting the PowerCon connector.

The VHD5100 amplifier operates in either 115V, 230V or 250V modes. Although pre - configured at the factory, the unit's operating voltage mode can be changed in the field. Amplifier power plug must remain readily operable. Your amplifier will be supplied preset to the voltage used in your area. The table below provides typical current draw figures for the VHD5100 Amplifier.


AC Input	Current draw with amplifier running at Average Power (Each Channel)	Current draw with amplifier running at Peak Power (Each Channel)
250V	3.2A	5A
230V	3.5A	5.4A
115V	7A	11A

Remember that if you are connecting both AC cables for the VHD5100 to the same AC power source then you will need to have double the per channel current available.

# VHD5100 · Features · Front panel



#### Front Panel

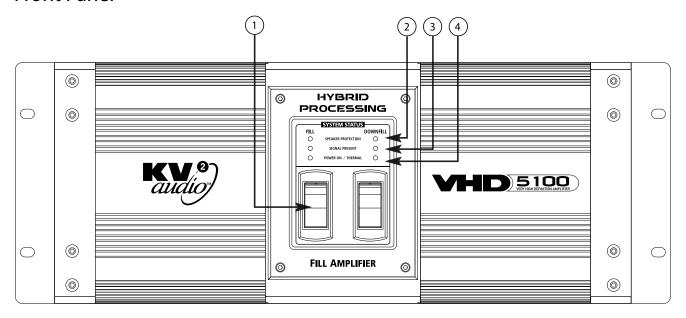

#### 1) AC Mains Switch

The VHD5100 Amplifier has a combination AC Main switch/circuit breaker on the front panel. If the switch shuts off during normal use, push it back to the ON position once. If it will not stay on you should take the unit to qualified service personnel to have it serviced.

#### 2) Speaker Protection

Yellow LED, indicates that the audio limiter has been activated. This RMS limiter protects speakers against overload.

#### 3) Signal Present

Green LED indicates when audio signal is present at the amplifier input.


#### 4) Power On / Thermal (Auto reset)

Green LED indicates that the AC power is on. When red, it indicates that the thermal limit of the VHD5100 Amplifier has been exceeded and the unit has shut down.

# VHD5100 · Features · Rear panel



#### Rear Panel

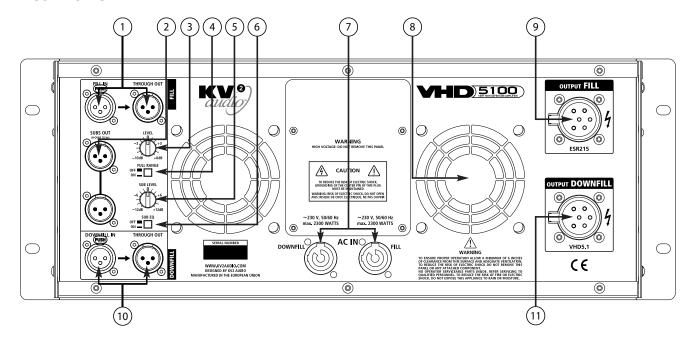

#### VHD5100 Fill Channel

#### 1) Fill in / Through out

This is the Fill channel input balanced XLR connector with associated Through Signal Output connector for sending unprocessed signal to other devices in a system.

#### 2) Subs out

Balanced XLR crossover subs output connectors, used to connect additional subwoofers. Outputs are active even when FULL RANGE switch is ON.

#### 3) Level

Input Level adjustment potentiometer that allows the user to adjust input levels from -10dB to +8dB.

#### 4) Full Range

Switch, selects the amplifier crossover setup, when ON: full range signal is reproduced by ESR215MkII cabinets, when OFF: signal is crossed over at 70Hz between OUTPUT FILL and the Subs out.

#### 5) Sub Level

This is the level control for the External Sub output in the range -12 to +12 dB.

#### 6) Sub EQ

This switch turns on the Low frequency enhancement circuitry (ON position) which boosts frequencies around 60Hz to enhance the lowest frequency band.

#### 7) Powercon Power Connectors

The VHD5100 Amplifier uses two connectors. Each connector supplies one channel. They accept standard PowerCon terminated AC Mains cables.

#### 8) Fans

The cooling fans operate continuously while the amplifier is on. An internal temperature sensor increases the speed of the fans during high temperature conditions. Air enters through the front dust filters and exits through the rear. Be sure to allow adequate air flow to the front of the rack in which the VHD5100 Amplifier is mounted.

#### 9) Output Fill

Speaker output, accepts a standard AP6 terminated loudspeaker cable for connecting up to a single ESR215Mkll cabinet.

#### VHD5100 Down-fill Channel


#### 10) Downfill in / Through out


This is the Downfill channel input balanced XLR connector with associated Through Signal Output connector for sending unprocessed signal to other devices in a system.


#### 11) Output Downfill


Speaker output, accepts a standard AP6 terminated loudspeaker cable for connecting up to a single VHD5.1 cabinet.


# Drawing














454.9








#### Full range setup

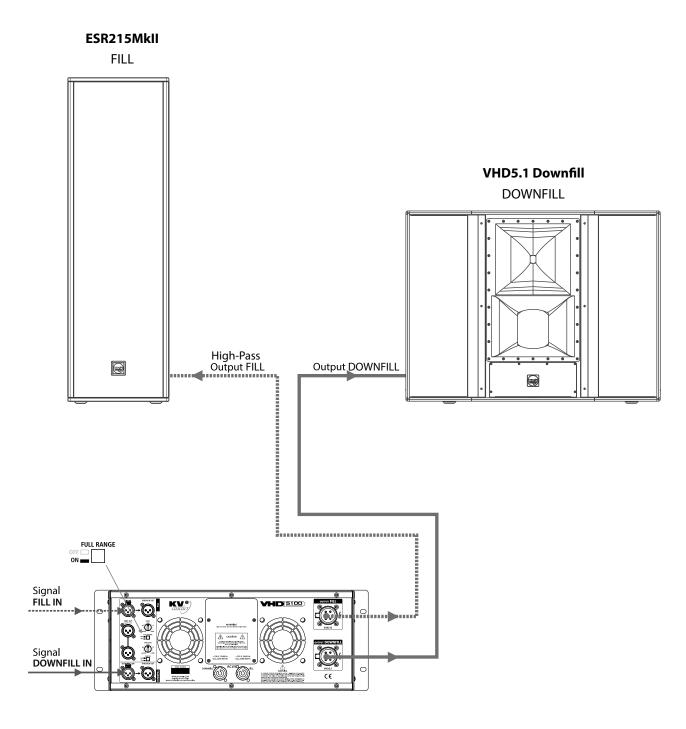

VHD5100 · Using the System



#### External subwoofer setup

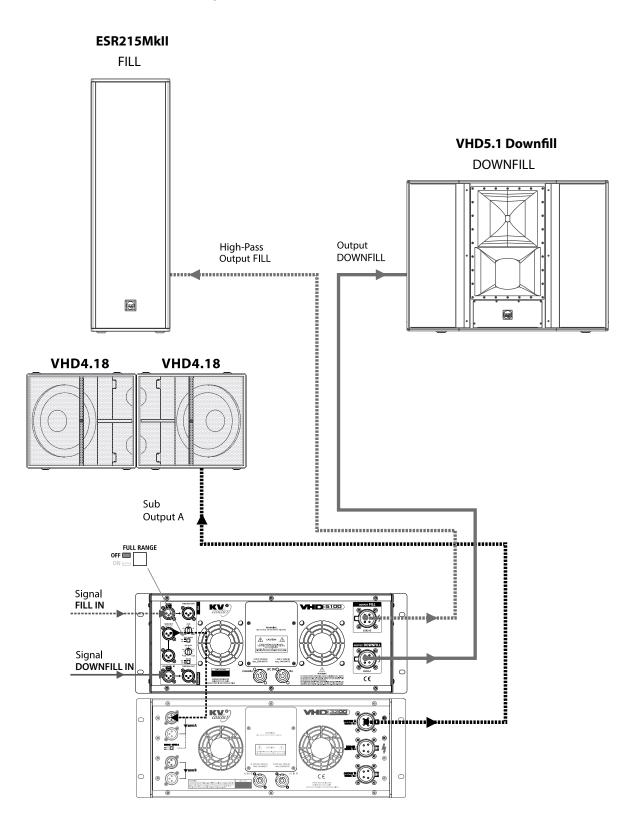

Set VHD5100 Amplifier to FULL RANGE OFF mode. Signal is crossed over at Hi/Mid for ESR215Mkll cabinets and SUB for external subwoofer. Crossover frequency is app. 70Hz.

SUB SET UP LEVEL setting depends on subwoofer type and music style.

# VHD5100 · Specifications



# Specifications


Out	put	Cha	nnel	s
Out	Put	C		•

Output Channels		
Number of Channels	2 (Fill + DownFill)	
Total Output Power	2x 1300W	
High Frequency Amplifier Specification		
Туре	Class AB - Push Pull - Low IM Design,	
	Transformer balanced output	
Rated Continuous Power	100W	
Distortion	<0.02%	
Operating Bandwidth	2,5kHz to 40kHz	
Mid Frequency Amplifier Specification		
Туре	Class AB - Push Pull - Low IM Design,	
Rated Continuous Power	Transformer balanced output	
	200W	
Distortion Operating Pandwidth	<0.02%	
Operating Bandwidth	400Hz to 2,5kHz	
Low Frequency Amplifier Specification		
Туре	High efficiency, Current-Enhancing,	
Rated Continuous Power	Switched-Rail Amplifier	
Distortion	1000W	
Operating Bandwidth	<0.02% 10Hz to 400Hz	
	10112 to 400112	
Signal Input		
Input Sensitivity Fill	1.55V RMS + 8dB - 10dB	
Input Impedance	$20$ k $\Omega$ (balanced)	
Input Sensitive DownFill	1.55V RMS	
Speaker Output		
Speaker Output	2x AP6 female	
Power Requirements		
Power Connector	2x Neutrik PowerCon®	
Operating Voltage	115V / 230V / 250V	
Operating Voltage Range	100 to 120V@60Hz   205 to 240V@50Hz  225 to 260V@50Hz	
Recommended Amperage	2x10A 115V   2x5A 230V   2x5A 250V	
Physical Dimensions		
Height	177.8 mm (7.0"), 4RU	
Width	481.4 mm (18.95")	
Depth	455.3 mm (17.93")	
Weight	39 kg (86lbs)	



#### VHD5100 Block Diagram


Channel DOWNFILL

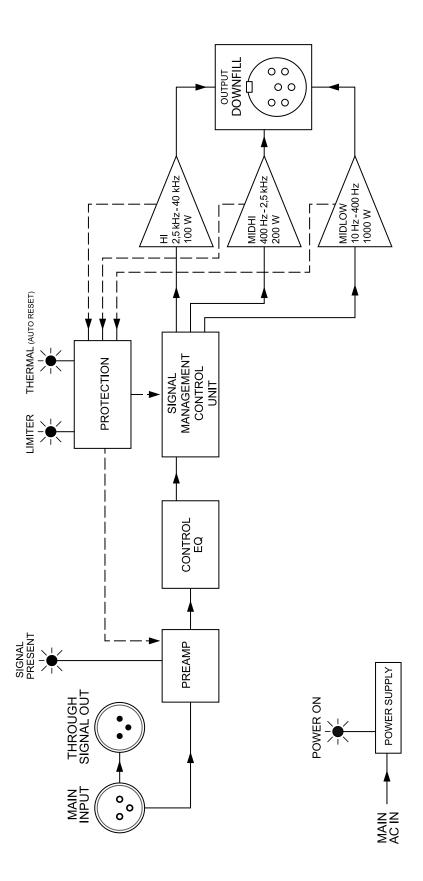



#### VHD5100 Block Diagram

Channel FILL

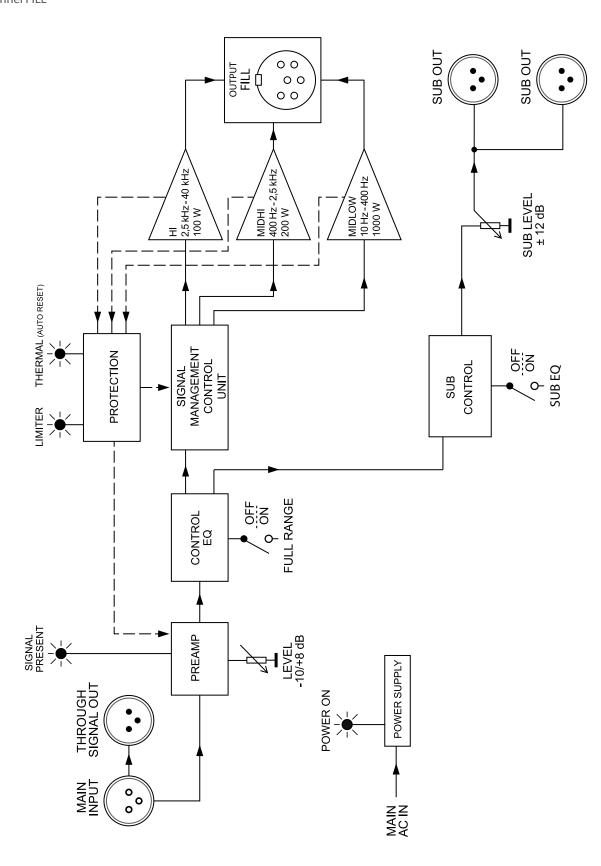

# VHD5 Power Unit · Front Panel




#### VHD5 Power Unit

The VHD5 Power Unit allows the VHD5000 series amplifiers to be used as an easy plug and play, rack mounted system. The unit provides power for a single VHD5000, plus one VHD5000S and three additional adjacent devices, for example the VHD5100 (using 2 of the 3 additional outputs) from just one 3 phase 230V/16A power outlet.

The VHD5 Power Unit also provides interconnection of all signal and data cables from the rear of the individual amplifiers to the front of the rack system. The Unit provides easy management of the system speaker cables between the amplifiers and the VHD5 series speakers, using an LK multi-pin connector. Many of the connections on the front of the unit are mirrored from those on the rear of the amplifiers, making the connectivity quick, easy and intuitive.

#### Front Panel

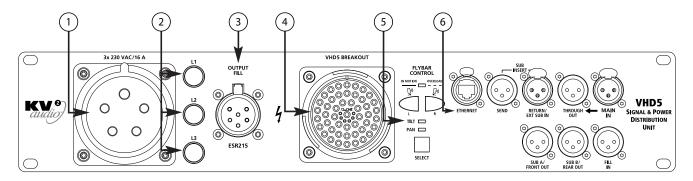

#### 1) 3x230 VAC/16A

This is the mains 3 phase 230 VAC/ 16 A mains power input accepting a standard IEC60309 230V/16A plug. NOTE - The VHD5000 amplifiers should be powered off when plugging or unplugging the 3 phase socket. When the remote control power on/off is required, use the amplifier's standby mode or a suitable 3 phase contactor.

#### 2) L1,L2,L3 indicators

These indicators light up green when L1, L2, L3 are present.

#### 3) OUTPUT FILL

This output socket serves as an interconnection between the VHD5100 amplifier's AP6 Fill speaker output and the front panel power unit.

#### 4) VHD5 BREAKOUT

Using an LK multipin connector, this is the main VHD5 system speakers output connector and contains a combined output for 1xVHD5.0, 3xVHD8.10, 1xVHD5.1 and control for the VHD5 Flybar.

#### 5) FLYBAR CONTROL


The Flybar control is two channels, one for complete system Tilt, the second for Pan (or Flybar rotation). The indicator shows which remote control function of the flybar is selected, altered by switching the button below. Using the Pan selection, the flybar rotates left when the left button is pressed and right when the right button is pressed. In the Tilt mode the left button offers tilt "up" or straight and the the right button will tilt the system down. The Flybar motor movement is indicated using the red tilt light. When the motor reaches its limit position, the motor automatically stops and the red light goes out. When the tilt light flashes, the motor output is overloaded and an auto reset cutoff is activated. This indicator may also flash during startup.

#### 6) Ethernet and signal - XLR inputs and outputs interconnections

The VHD5 Power Unit serves as the interconnection of signal, power and data cables from the back to the front when using VHD5000 series amplifiers rack mounted. Each connector is labeled on the front to mirror the inputs and outputs on the rear which are then connected permanently into the VHD5000 series amplifiers, making the rack interconnection intuitive and speeding up the overall set up process.

# VHD5 Power Unit · Rear Panel



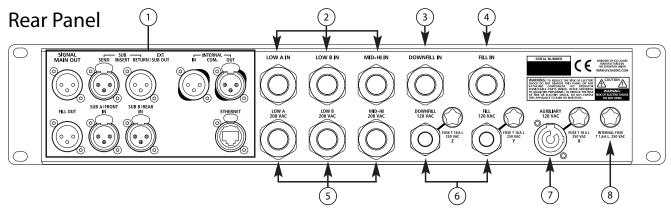

#### 1) Ethernet and signal - XLR inputs and outputs interconnections

The VHD5 Power Unit enables the interconnection of cables for signal, power and data from the back to the front when using rack mounted amplifiers. Each connector is labeled on the front to mirror the inputs and outputs on the rear of the unit making the rack interconnection intuitive and speeding up the overall set up process.

#### 2) LOW A IN, LOW B IN, MID-HI IN

These serve as the interconnections between the VHD5000 / VHD5000S amplifiers AP6/4 connector outputs and the front panel power unit VHD5 single breakout socket. This is done via the VHD5 breakout LK Multi pin connector feeding the VHD5 system with VHD5.0 Low /Mid/Hi and VHD8.10 Low. Each connector is labeled on the back to mirror the outputs on the rear of the amplifiers making the permanent rack interconnections quick and intuitive.

#### 3) DOWNFILL IN

Serves as an interconnection between the VHD5100 amplifier's AP6 speaker outputs and the front panel power unit output via the VHD 5 breakout LK Multi pin connector, feeding the VHD5 system with VHD5.1 downfill.

#### 4) FILL IN

Serves as an interconnection between the VHD5100 amplifier's AP6 Fill speaker output and the front panel power unit.

#### 5) LOW A 230 VAC, LOW B 230 VAC, MID-HI 230 VAC

These are the mains power connections feeding the VHD5000 and VHD5000S amplifiers from the 3 phase 230V mains power input on the front panel. Each output is clearly marked with its phase.

#### 6) DOWNFILL 230 VAC, FILL 230 VAC

These are the mains power connections feeding the VHD5100 amplifiers from the 3 phase 230V mains power input on the front panel. Each output is marked with its phase. Output is protected with a mains fuse. The maximum power output is 8A RMS.

#### 7) AUXILIARY 230 VAC

There is the additional 230V power output on a Neutrik PowerCon for powering adjacent devices such as signal processors. Output is protected with a mains fuse. The maximum power output is 8A RMS.

#### 8) INTERNAL FUSE

This is the VHD5 Power Unit mains fuse.



To indicate that caution is necessary when operating the device or control close to where the symbol is placed, or to indicate that the current situation needs operator awareness or operator action in order to avoid undesirable consequences.

This device is not suitable for use in places where children may be present.


#### Rack Mounting

VHD5000 will mount in standard 19" rack systems. Integral rear mounting rack ears are also provided for additional support, do not rely on fixing and mounting the amplifiers using just the front panel as support. Use eight screws and washers to mount the amplifier to the equipment rack rails (four for the front and four for the rear).

We recommend using a shock mounted rack for touring use to prolong the life of your VHD5000 amplifiers.



#### Power Unit Wiring Scheme with VHD5000, VHD5000S and VHD5100

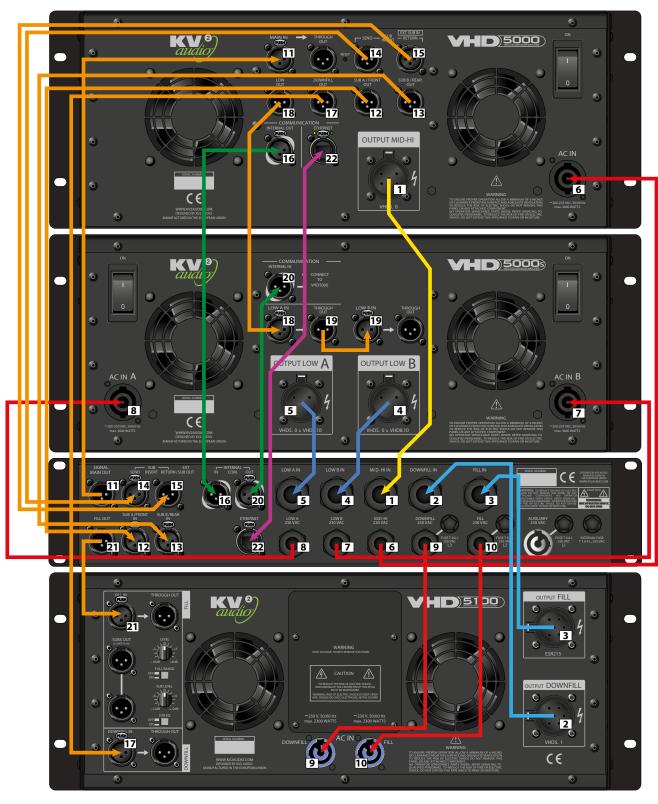

#### **EXPLANATIONS:**

XLR - signal (11-15, 17-19, 21)

XLR - internal communication (16, 20)

Ethernet CAT5 (22)

Amphenol 6P / LK Link 8p - Mid-Hi speaker output (1)


Amphenol 4P / LK Link 9P - Low-Mid speaker output (4, 5)

Amphenol 6P - Downfill/Fill speaker output (2, 3)

Powercon (6-10)

# audio)


#### Power Unit Wiring Scheme with VHD5000, VHD5000S and VHD5100

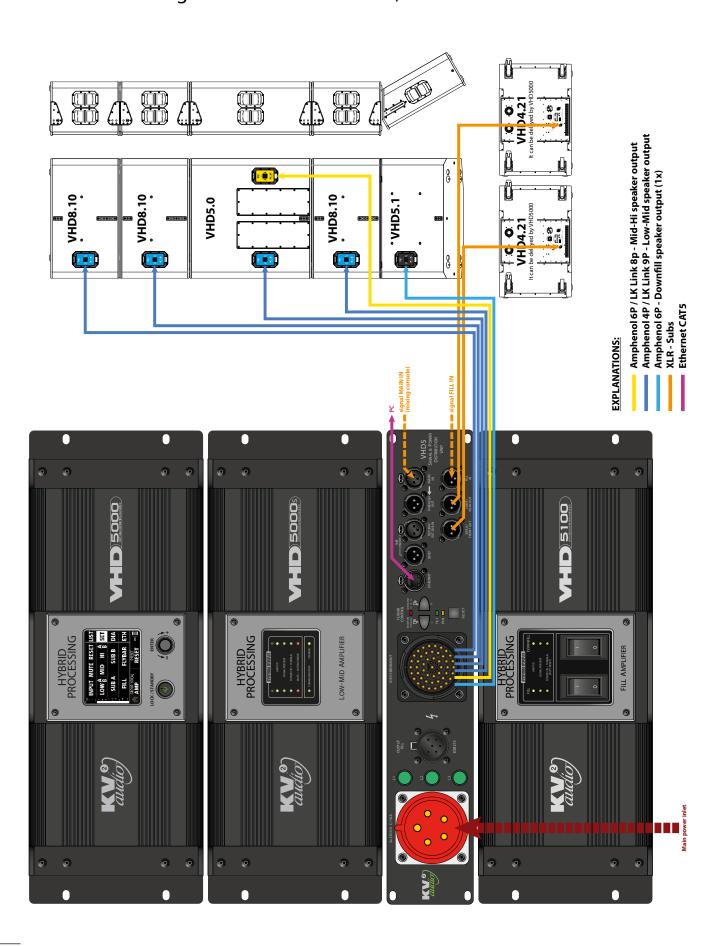

# VHD5 Power Unit · Basic configuration



Basic configuration VHD5.0 + 3x VHD8.10 with VHD5.1 downfill

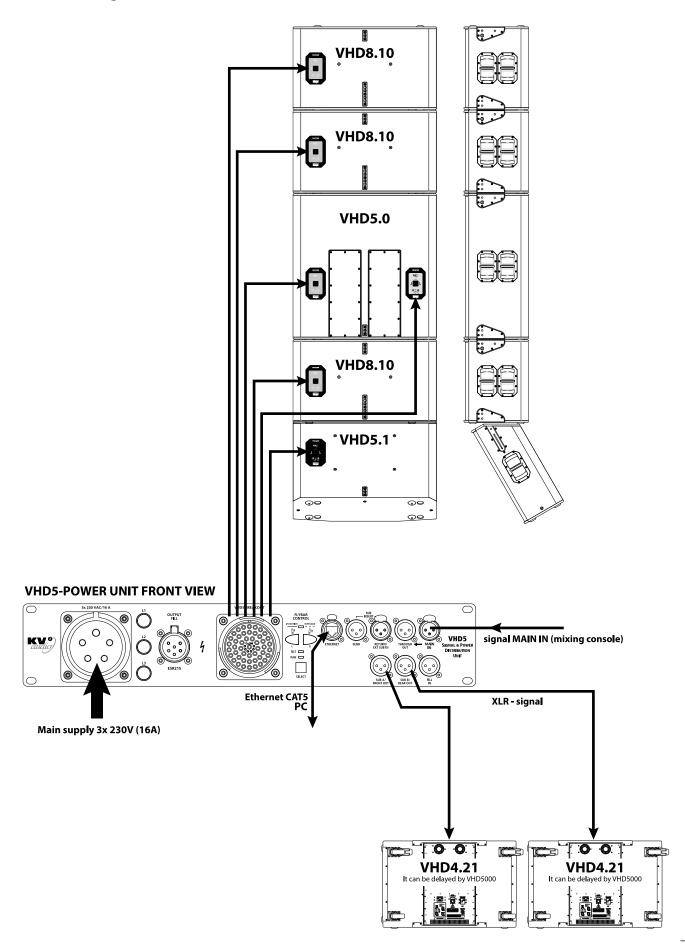

# VHD5 Amplifiers · Warranty · Service



#### Warranty

Your VHD5 Amplifiers are covered against defects in material and workmanship.

Refer to your supplier for more details.

#### Service

In the unlikely event that your VHD5.0 Amplifiers develops a problem, it must be returned to an authorized distributor, service centre or shipped directly to the KV2 Audio factory. Because of the complexity of the design and the risk of electrical shock, all repairs must be attempted only by qualified technical personnel.

If the unit needs to be shipped back to the factory, it must be sent in its original carton. If improperly packed, the unit may be damaged.

To obtain service, contact your nearest KV2 Audio Service Centre, Distributor or Dealer.







# The Future of Sound. Made Perfectly Clear.

#### **KV2 Audio International**

Nádražní 936, 399 01 Milevsko Czech Republic

Tel.: +420 383 809 320 Email: info@kv2audio.com

www.kv2audio.com

KVV120124-00-06-0