

Introduction

The ESP4000 is an ultra high definition 4 channel rack mountable power amplifier from KV2 Audio, specifically designed for optimised performance with ESD loudspeakers, as well as with other passive systems. For the ESP4000 all electronic circuit boards are first mounted on individual aluminium heat sinks, then on a secondary, internally sealed chassis, this leaves only the heatsink fins exposed. Two separate power supplies ensure increased reliability and continuous delivery of full power. Two shock mounted fans move air across the fins but never directly across the electronic components. This minimises maintenance cycles and improves the components lifespan and reliability. The ESP4000 is housed in a professional 4U road rugged steel metal case with aluminium handles and evenly distributed weight.



Features

- Ultra high definition
- 4 channel rack mountable power amplifier
- Specifically designed for optimised performance with ESD loudspeakers, as well as with other passive systems
- 4 x 1000W / 2Ω
- Two separate power supplies ensure increased reliability and continuous delivery of full power
- Two shock mounted fans move air across the fins but never directly across the electronic components. Minimises maintenance cycles and improves the components lifespan and reliability

Application

Designed to drive the ESD and ESM range of passive loudspeaker units with superior sound quality

- Portable PA
- Fixed installations
- Monitor Amplifier

System Acoustic Performance		Signal Input	
-1dB Response	3Hz to 40kHz	Input Channels	XLR
Channel Crosstalk	>60dB	Input Sensitivity	1.55V
Signal to Noise Ratio	>115dB	Input Impedance	20kΩ (balanced)
Total Harmonic Distortion	<0.005% (1W) / <0.01% (clip -1dB)	Signal Output	XLR Through
Output Channels		Speaker Input	
Amplifier Type	High efficiency, Emitter coupled	Speaker Input	- / 4x Binding posts, Neutrik Speakon®
Number of Channels	4	Features	
Total Output Power	4000W	Level Control	-∞ to 0dB
Max. Output Voltage	78V (peak) per channel	Loudness bass enhancement	+6dB @ 60Hz
Max. Output Current	48A (peak) per channel	RMS Limiter	On / Off
Minimum load impedance per channel	2Ω	Indicators	Power ON/Thermal, Signal/Limiter
Out. Power 16Ω - 1 channel / 2 channels loaded	175W / 160W (RMS)	Power	
Out. Power 8Ω - 1 channel / 2 channels loaded	340W / 300W (RMS)	Power Connector	2x Neutrik PowerCon®
Out. Power 4Ω - 1 channel / 2 channels loaded	600W / 500W (RMS)	Operating Voltage	115V / 230V / 250V
Out. Power 2Ω - 1 channel / 2 channels loaded	1000W / 800W (RMS)	Operating Voltage Range	100 to 120V@60Hz 205 to 240V@50Hz 225 to 260V@50Hz
Out. Power 16Ω - bridged	600W (RMS)	Recommended Amperage	2x20A 115V 2x10A 230V 2x10A 250V
Out. Power 8Ω - bridged	1000W (RMS)	Soft Start	YES
Out. Power 4Ω - bridged	1600W (RMS), 2000W short term	Protection	Thermal breaker
		Cooling	2x temperature controlled fans
		Physical Dimensions	
		Height	177.8 mm (7.0"), 4RU
		Width	481.4 mm (18.95")
		Depth	495 mm (19.5")
		Weight	37.5 kg (82.7lbs)

Architectural Specifications

The Power Amplifier shall provide four individual application specific electronic channels of amplification for ESD Loudspeaker enclosures, with internal loudspeaker protection, filter networks and equalization using SLA Technology - (Super Live Audio).

The output Topology shall be High Efficiency Emitter Coupled design.

The input sensitivity shall be 1.55V RMS, the input Impedance shall be 20Kohm. Maximum Power Outputs of each channel shall be 1000W RMS @ 2ohms. The Power Amplifier-Controller shall have an operating bandwidth of 3Hz to 40 KHz (-1db) and an operating distortion factor of less than <0.005% across all output channels.

The Power Amplifier shall have electronically balanced XLR input connectors, with XLR thru and insert connectors.

The rear panel shall incorporate: Loudspeaker Output connectors shall be Neutrik Speakon™ accompanied by four double Binding posts for bare wire connections. There shall be four individual channel attenuation knobs.

The front panel shall incorporate: Limiter ON/OFF Push Button switch and Bass EQ Push Button switch for each channel.

The Power Amplifier shall have front panel indicators for Power/Thermal, Signal/Limiter.

Two large Thermal Breaker switches shall be used for switching on/off.

The Power Amplifier shall have two Neutrik PowerCon connectors for mains supply to two individual transformers with an operating voltage range of 100 to 120V @ 60Hz, 205 to 240V @ 50Hz and 225 to 260V @50Hz. A soft start circuit will limit inrush power.

The Power Amplifier shall have recommended Amperage of 2 x 20A @115V, 2 x 10A @230V, 2 x 10A @250V.

2 x Temperature controlled variable speed fans will assist internal convection cooling systems.


The Amplifier chassis and enclosure shall have dimensions of 177.8 mm /7.0" 2U x 481.4 mm / 18.95" x 495 mm / 19.5".

The total weight will not exceed 37.5 kg /82.7lbs.

The Power Amplifier shall be the KV2 Audio ESP4000.

The Power Amplifier shall be specifically for the ESD range of Loudspeaker units and third party loudspeakers.

Dimensional Drawings

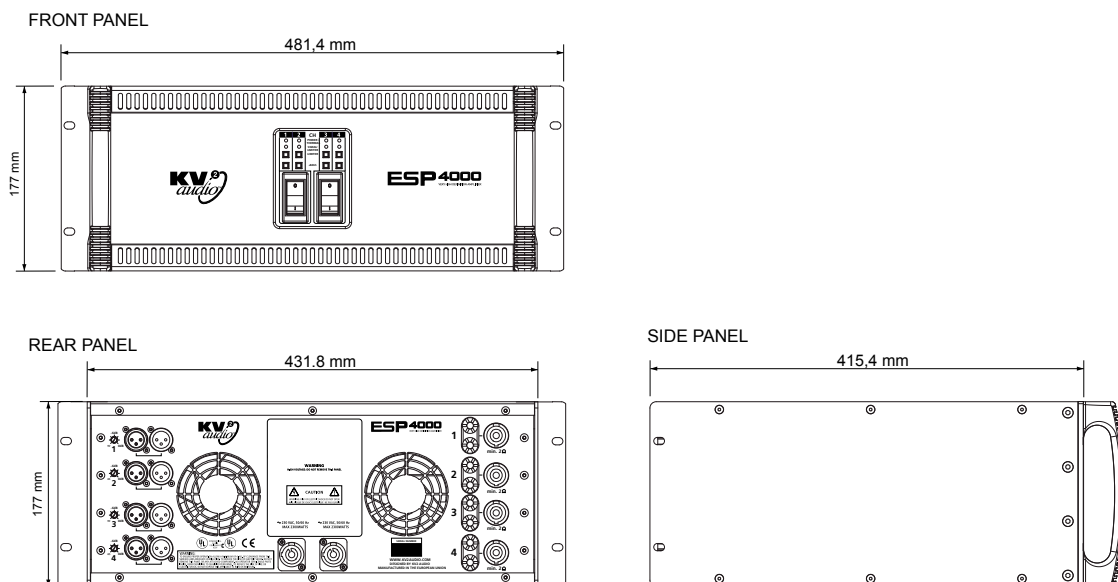

The future of sound. Made perfectly clear.



KV2 Audio International, Nádražní 936, Milevsko 399 01, Czech Republic
 Tel.: +420 383 809 320
 Email: info@kv2audio.com | Web: www.kv2audio.com