


KT2.0 Technical Data Sheet

Introduction

The KT2.0 is the Mid High Module for K-RIG. Its two-way horn loaded design provides optimal output and coverage that far exceeds that of a normal frontloaded 12 and horn box or a number of small line array elements. It consists of a horn loaded high power 12" mid bass speaker with integral phase plug and a 2.5" titanium diaphragm compression driver on an 80° H x 40° V constant directivity, wide dispersion horn. The KT2.0 is driven and controlled by two channels of the K-PAK controller amplification system and must be used with two KT2.15 bass speakers. It is constructed of poplar to reduce weight for ease of stacking and coated in a heavy-duty, wear resistant polymer coating.

Features

- Professional Baltic birch construction with wear resistant polymer coating
- 132dB sustained output, 135dB peak
- Controlled wide dispersion 80° x 40°
- 2.5" (64 mm) Titanium diaphragm compression driver with complex geometry phase plug and ferrite magnetic structure
- Horn loaded, 12" mid-bass driver, with a 2.5" (64 mm) voice coil and ferrite magnetic structure
- Two way active requirement - 700W from the KPAK Amplifier providing 500W for the 12" low mid and 200W for the high frequency driver
- Proprietary side handle design for simplified handling and carrying
- High impact low friction feet, for lock-in and easy cabinet movement

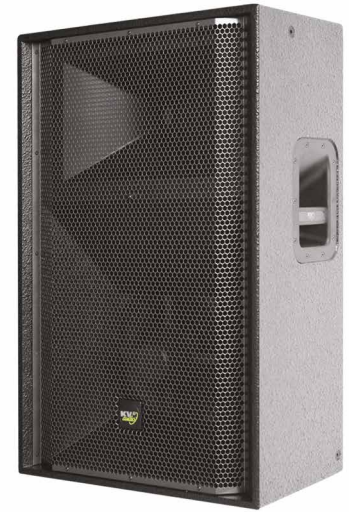

Application

Specifically designed as a Mid/Hi speaker for the K-RIG loudspeaker systems

- Portable PA
- Dance clubs
- Reproduced music

System Acoustic Performance	
Max SPL Long-term	132dB
Max SPL Peak	135dB
-3dB Response	(+ 2x KT2.15: 42Hz) 180Hz to 18kHz
Crossover Point	180Hz / 1.4kHz
High Frequency Section	
Acoustic Design	Horn Loaded
High Horn Coverage Horizontal / Vertical	80° x 40°
Throat Exit Diameter / Diaphragm Size	1.4" / 2.5"
Diaphragm Material	Titanium
Magnet Type	Ferrite
Mid-Bass Section	
Woofer Size / Voice Coil Diameter / Design	12" / 2.5" / Inside Outside
Diaphragm Material	Epoxy Reinforced Cellulose
Magnet Type	Ferrite


Speaker Input	
Speaker Input	2x Neutrik Speakon® - NL8
Cabinet	
Cabinet Material	Poplar
Handles	2
Pole Mount	1
Color	"Orange peeled" Matt Black
Physical Dimensions	
Height	852 mm (33,54")
Width	550 mm (21.66")
Depth	325 mm (12.8")
Weight	40 kg (88.2lbs)

KT2.0 Technical Data Sheet

Architectural Specifications

The two-way loudspeaker shall consist of a 12" mid bass driver with a ferrite magnet mounted in an integral horn with phase plug assembly and a 2.5" titanium diaphragm ferrite magnet compression driver mounted on a constant directivity horn. The enclosure shall be made from poplar with an impact resistant black paint finish with a powder coated metal grill. The connection panel on the back shall be recessed and fitted with one NL8 socket. The loudspeaker shall only be operated by a dedicated, compatible controller amplifier, utilising two separate channels delivering 500W for the mid-range and 200W for the high frequencies. The loudspeaker shall have a nominal dispersion angle of 80°x 40° (HxV). The frequency response (-3dB) measured on axis shall be 180 Hz to 18 kHz with a maximum sound pressure of 135 dB when operated with dedicated controller amplifier. The dimensions shall not exceed 550 mm x 852 mm x 325 mm (W x H x D) and shall weigh no more than 34 kg.

Dimensional Drawings

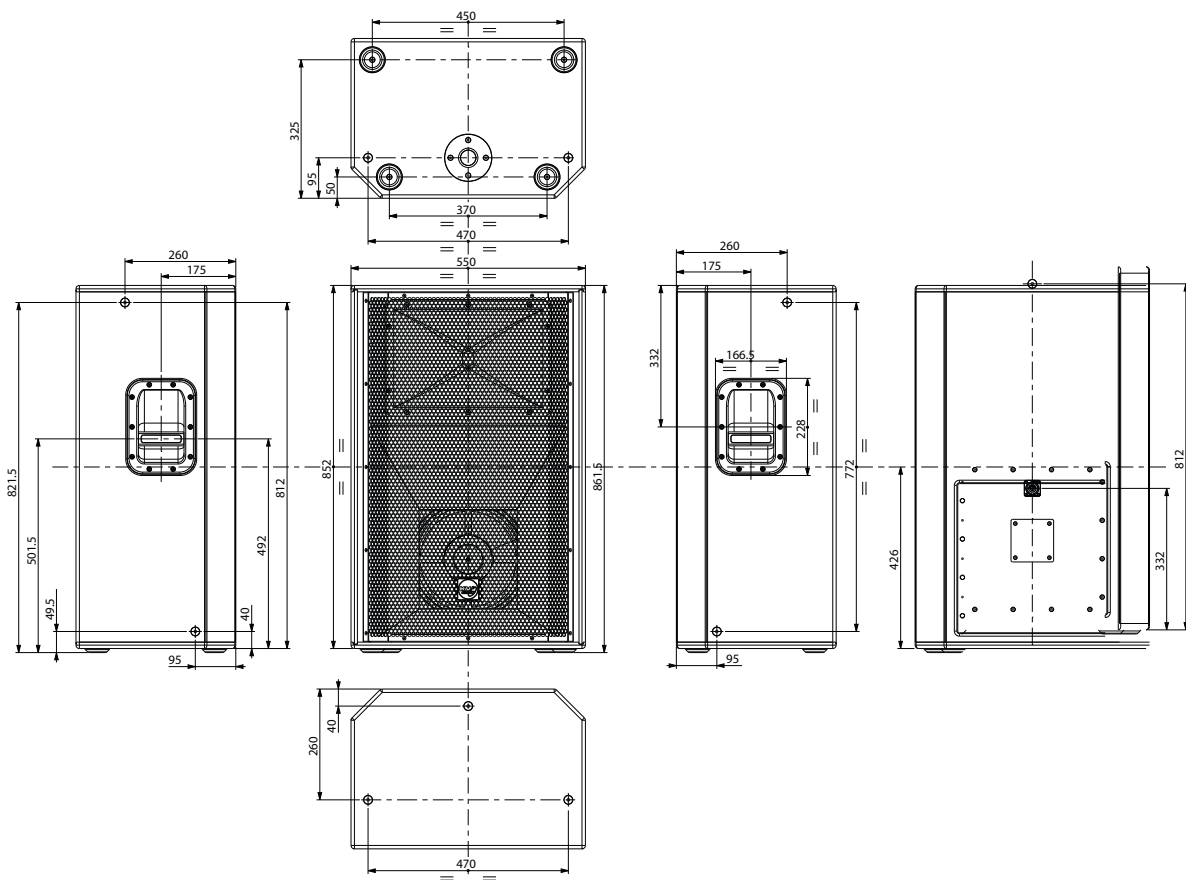

The future of sound. Made perfectly clear.



KV2 Audio International, Nádražní 936, Milevsko 399 01, Czech Republic
Tel.: +420 383 809 320
Email: info@kv2audio.com | Web: www.kv2audio.com