



# Constant Power Point Source Array

---

**VHD5.0**

# Constant Power Point Source Array

## VHD5.0

Introduction

VHD5.0 - Mid High Module

VHD8.10 - Low Mid Module

SL412 - Downfill

VHD5.0 Amplifiers

Transportation

Wiring schematic

Technical Specifications



VHD5.0 Product Overview video



Watch all of our product videos on **You Tube**.  
[www.youtube.com/c/KV2Audio.com](https://www.youtube.com/c/KV2Audio.com)

## A Bold New Advancement in Concert Sound Reinforcement

KV2 Audio's philosophy has always been to embrace the principles of point source speaker system design to provide optimum sound quality and coverage for applications and audiences of all sizes. The challenge for KV2 in building a large point source system for audiences of 50,000 people plus, was to reproduce the low mid energy that certain line arrays provide, through the summing of multiple drivers, whilst maintaining the key benefits of point source technology. These benefits include minimal destructive interference in the higher frequency range, accurate impulse response and superior sound.


Utilizing highly advanced point source speaker design, extremely efficient power management amplifier technology and totally unique hybrid signal processing, KV2 has created the first major advancement in large scale concert sound reinforcement since the development of the Line Array. The VHD5.0 Constant Power Point Source System is a true feat of engineering. Over five years in development it brings the benefits of point source technology to large-scale concert sound reinforcement. The system delivers audio over large areas with clarity and definition simply not achievable from the digitally processed line arrays that are so commonly used today.



## Time-Shifts, Properties of Multi Point source

For some time now line arrays have been predominantly used for large concert sound systems. Having all components in a single axis array has solved certain issues in respect to comb filtering problems in the horizontal plane, but destructive interference still occurs from the multiple HF horns mounted vertically. The loss of high frequencies and cancellations through air disturbance caused


by audience heat and wind is another major issue. Manufacturers have attempted to correct these problems in numerous ways both through acoustic design and DSP, however the end result has been further reductions in resolution, due to the limitations of digital sampling and the simple principles of physics that cannot be ignored.

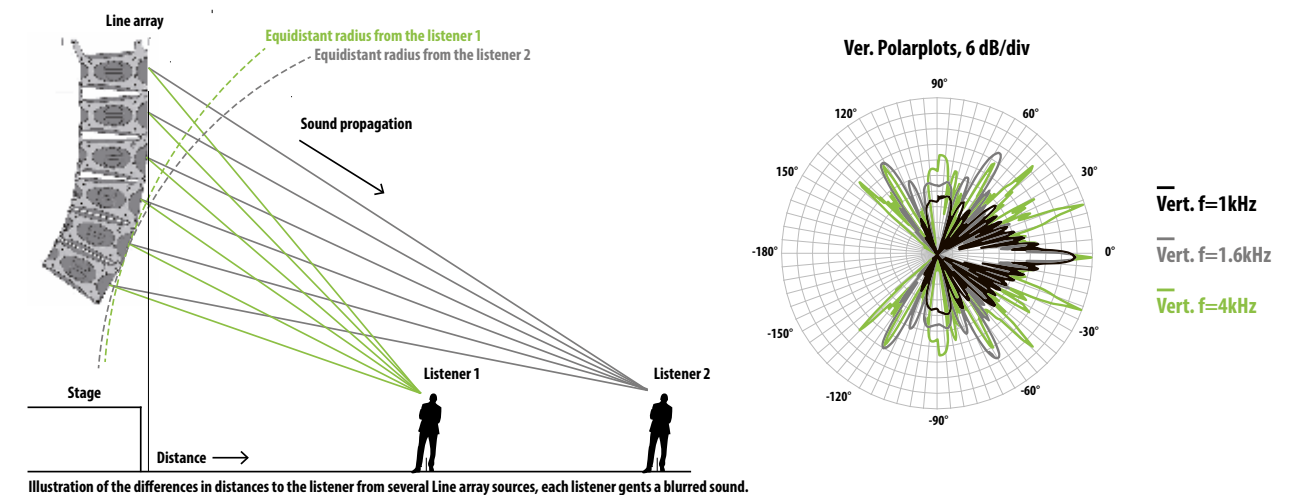

## Time-Shifts, Properties of Point source

At KV2 we believe that definition equals distance and the higher the reproduction quality of the source, the better the intelligibility over distance. The theory that line arrays have less losses over distance than point source is not only incorrect, but somewhat irrelevant if the sound is not intelligible at the back of the venue anyway. To achieve the high definition needed to cover long

distances we have focused on developing unique hybrid processing, which takes the very best available technologies in both the analogue and digital domains, advancing system design to a whole new level. The end result is ultimate resolution, Very High Definition sound, impulse accuracy and phase coherent audio arriving at the listening position, even over long distance.

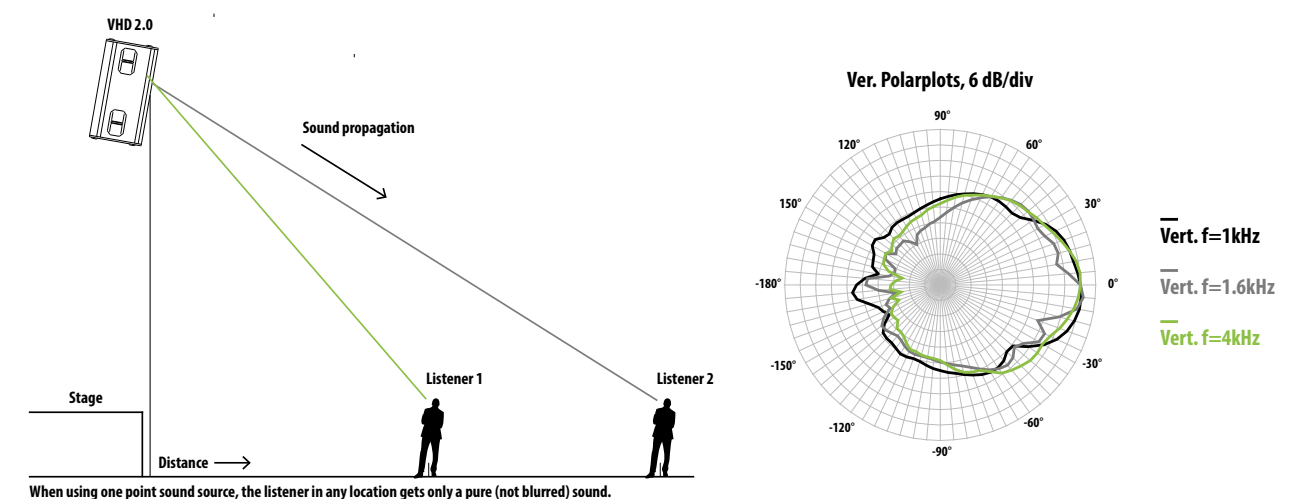




To cover very large crowds you need a large system capable of delivering high SPL, running multiple components. To do this, as one large point source enclosure is somewhat difficult as it would be almost impossible to move around or transport.

With the VHD5.0 Constant Power Point Source Array, KV2 has focused on creating a modular system that has minimal destructive interference while utilising multiple components in a small number of cabinets. VHD 8.10 Low Mid Expansion Boxes are arrayed around the VHD5.0 Mid High Enclosure providing the extra headroom needed to deliver the low mids, keeping the sound balanced.

2kHz - 20kHz    400Hz - 2kHz    45Hz - 400Hz

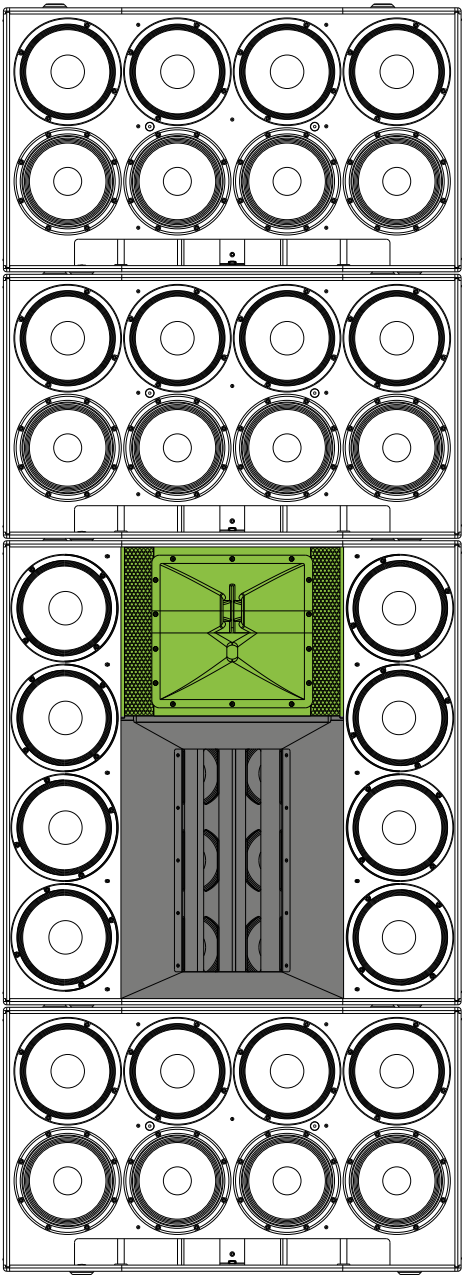

High Frequency Horn

In essence the system is pieced together to represent one very large point source, each part of the system is proportional in size to the frequency wavelengths it reproduces. The radiated power of each bandwidth therefore remains consistent and balanced in relation to the overall frequency response. This ensures the same sound is delivered to every seat in the house.

The high frequency horn in the VHD5.0 combines three 3" NVPD (Nitrate Vapour Particle Deposition) Titanium Drivers on a special manifold horn with summing wave-guide. Delivering incredible output with extremely low distortion, this unique horn assembly provides crystal clear highs over distance with much higher resistance to air disturbances.

## VHD5.0 - Mid High Module

The VHD5.0 is a three-way enclosure handling low mids, mids and highs over a frequency range from 45Hz through to 20kHz. It incorporates eight front-loaded ten inch low mid drivers, six horn-loaded eight inch mid range drivers and three 3" NVPD (Nitrate Vapour Particle Deposition) Titanium compression drivers on a custom designed, manifold horn assembly with summing waveguide. With the capacity to run full range down to 45Hz the VHD5.0 is usually crossed over at 70Hz to the VHD4.21 Active Sub Bass Modules. Both the VHD5.0 and VHD8.10 cabinets incorporate very simple to use integrated fly ware that links cabinets together quickly and easily. A complete system (4 VHD5.0's and 12 VHD8.10's) can be flown by two people in less than two hours.

## VHD8.10 - Low Mid Module

When multiple low mid drivers are arrayed on a single axis they sum providing a considerable increase in the amount of low mid energy present and available in the 200Hz to 500Hz range. A lot more energy is needed in this area than in the higher frequency ranges so this summing effect helps deliver headroom in the system and keeps the overall sound balanced. To provide the required energy in the low mid, needed to cover very large audiences, KV2 developed the VHD8.10 Low Mid Expansion Box. This enclosure carries a further 8 front-loaded ten inch speakers and 3 of these cabinets are added to each VHD5.0. This provides a total of 32 ten inch speakers giving the extra headroom needed in the low mid band and extended projection of these frequencies over distance.

## SL412 - Downfill

Based on KV2 Audio's VHD technology, the SL412 loudspeaker acts as a downfill for the larger VHD5.0 system utilising four 12" low mid-range components and a wide dispersion horn housing the same single 8" mid-range and 3" large format NPVD compression Driver found in the VHD 5.0. This mid-high horn has an extremely coherent wide horizontal dispersion of over 110°, perfect for this larger VHD downfill application.





## VHD4.21 Active Bass Module

The VHD4.21 Active Bass Module consists of two purpose designed Very High Definition enclosures, one active and one passive, each containing two custom designed 21" woofers. A Low Q design has been applied to attain the optimum speaker loading, enabling a high sensitivity of 109dB 1w/1 m. Running at close to 100% efficiency on any voltage from 160 to 270 Volts, the amplifier for the VHD4.21 is a revolution in electronic engineering, utilising a huge bank of capacitors as a power store.

This unique and innovative new power management system enables the onboard amplifier to deliver peak output levels of 14 kW, whilst operating at a modest constant power consumption of 3.5 kW from a 16 A circuit. The VHD4.21 Active Module represents proven KV2 Subwoofer Amplifier technology that has been consistently improved over the last decade to provide maximum control over the movement of large mass speakers. The end result is a fast, dynamic, Very High Definition subwoofer, truly capable of reproducing the articulation in a bass guitar, whilst also extending down to 28Hz.



## VHD5000 Amplifier Controller & VHD5000S Slave Amplifier

The VHD5000 amplifier controller contains two Class AB amplifiers totalling 900 watts for the high frequencies and a 1200 watt Class H amplifier for the mids. It also controls the VHD5000S which houses two 2500 watt Class G amplifiers that power low mids in the system. Outputs from the VHD5000 also feed KV2 SL3000 Amplifiers, driving SL412 cabinets for Downfill and Groundfill applications.

The VHD5000 incorporates state of the art hybrid processing via discrete ultra fast analog circuitry and our proprietary 20MHz PDM technology for all required filtering and time alignment. A front panel touch screen allows easy muting and level adjustment of the frequency bands and full adjustment of the digital delay lines and other parameters on board. Control can also be done remotely via Ethernet or Wi Fi.

The VHD5000 is fully networkable allowing viewing and adjustment of all amplifiers and slaves from the one remote location. Onboard two 96kHz PCM delays are available to adjust the position of the subs or for creating cardoid sub patterns while two Very High Definition 20MHz PDM delays allow movement of the main system without the loss of resolution experienced when using much lower sampling rates.

A harmonics restoration circuit is also built in and fully controllable from the touch screen. This adds back in harmonics lost through a digital sampling process earlier in the audio chain, such as losses caused by the internal processing of digital mixers. Full diagnostics show a number of parameters including impedance sensing, providing information in respect of any potential problems with the system's components.

## VHD5000 Master

Rack mounted active control and amplification unit specifically designed in conjunction with VHD5000S for powering the VHD5 loudspeaker system.

## VHD5000S Slave

The VHD5000S is a rack mounted, high efficiency, low/mid amplifier, specifically designed in conjunction with VHD5000 for powering the VHD5.0 low/mid and VHD8.10 loudspeaker system.



## K-NET

A front panel touch screen allows easy muting and level adjustment of the frequency bands and full adjustment of the digital delay lines and other parameters on board. Control can also be done remotely via Ethernet or WiFi utilizing our proprietary K-NET networking.






# Transportation

The VHD 5.0 system is easily transportable using a fully locking dedicated heavy duty cart and further protected with strong padded durable nylon covers. The perfect size to load on a truck, with well balanced handles and an impressive size to weight ratio, the logistics of this system have been perfected with the same attention to detail as the exceptional audio reproduction, to guarantee a fast and efficient load in or out.




# Extremely Durable Coating

Our answer to the strongest and most weather resistant paint finish KV2 has ever used. A unique chemical formula has been devised to create this extremely durable polyurethane coating, offering a seamless, flexible and impact resistant plastic protection to all wooden surfaces on the cabinet. The exceptional weatherproofing properties resist moisture intrusion, as well as cracking and peeling, whilst offering exceptional protection against U.V or exposure when used in areas of high humidity.

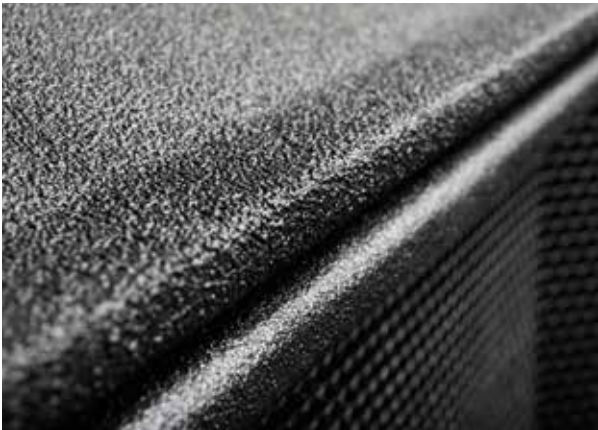

# Wiring schematic

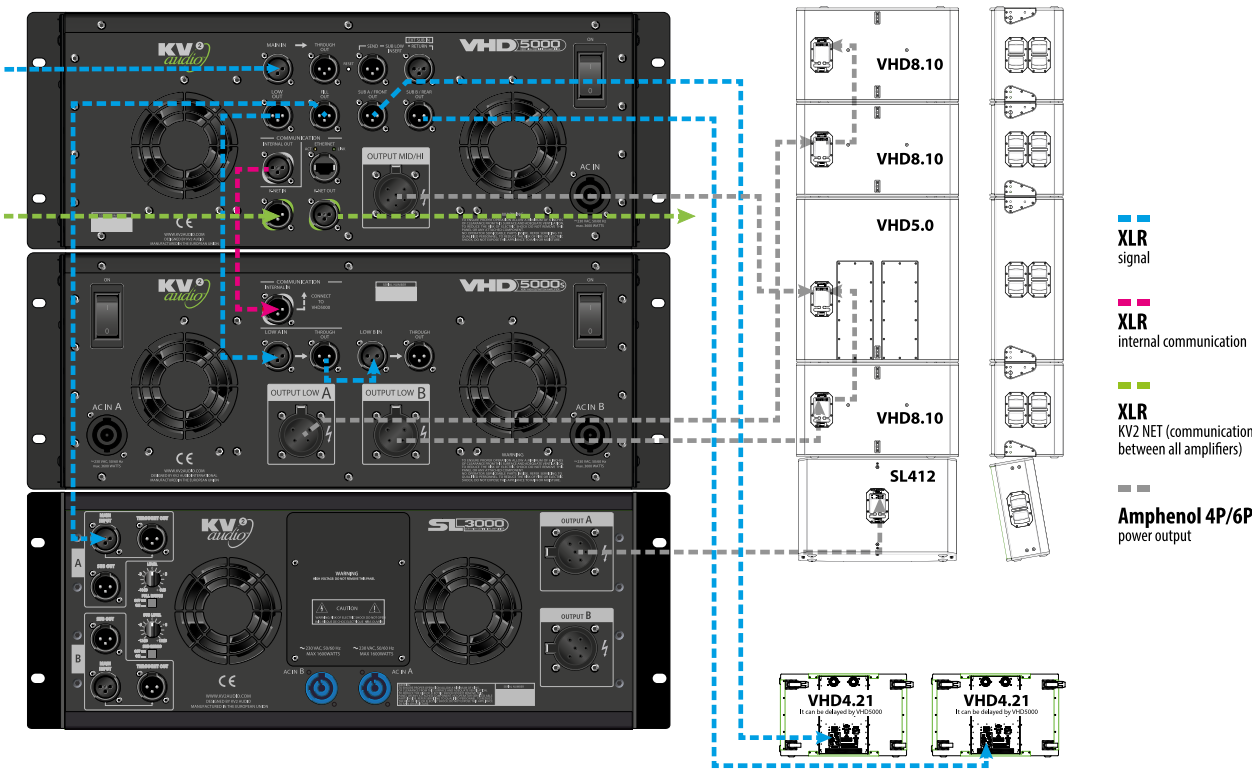

# Technical Specifications

## System Acoustic Performance (VHD5.0 & VHD8.10)

Max SPL Long-term	147dB
Max SPL Peak	150dB
-3dB Response	45Hz to 20kHz
-10dB Response	45Hz to 22kHz
Full Range mode -3dB Response	50Hz to 20kHz
Crossover Point	70Hz, 400Hz, 2.0kHz

## High Frequency Section

Acoustic Design	Horn Loaded
High Horn Coverage Horizontal / Vertical	80° x 30°
High Frequency Amplifier Requirement	VHD5000
Throat Exit Diameter / Diaphragm Size	3x 1.4" / 3.0"
Diaphragm Material	Nitride Titanium
Magnet Type	Neodymium

## Mid Range Section

Acoustic Design	Horn Loaded
Mid Horn Coverage Horizontal / Vertical	80° x 30°
Mid Frequency Amplifier Requirement	VHD5000
Speaker Size / Voice Coil	6x 8" / 3.0" / Trans Coil
Diaphragm Material	Epoxy Reinforced Cellulose
Magnet Type	Neodymium

## Mid-Bass Section

Acoustic Design	Front Loaded
Mid-bass Amplifier Requirement	VHD5000 + VHD5000S
Woofer Size	32x10"
Diaphragm Material	Epoxy Reinforced Cellulose
Magnet Type	Neodymium/Ferrite

## Ultra Low Frequency Section (VHD4.21)

Max SPL Long-term	147dB
Max SPL Peak	150dB
-3dB Response	34Hz to 180Hz
-10dB Response	28Hz to 240Hz
Crossover Point	70Hz

Acoustic Design	Bandpass with low port losses
Subwoofer Amplifier Requirement	Active system
Woofer Size / Voice Coil	4x 21" / 5.3"
Diaphragm Material	Epoxy Reinforced Cellulose
Magnet Type	Neodymium Advanced Ventilated

## Physical Dimensions

### VHD5.0 - Mid High Module

Dimensions (height x width x depth)	1125mm (44.29") x 1110mm (43.7") x 500mm (19.69")
Weight	151kg (332.2lbs)

### VHD8.10 - Low Mid Module

Dimensions (height x width x depth)	640mm (25.20") x 1110mm (43.7") x 500mm (19.69")
Weight	92 kg (202.4lbs)

### SL412 - Downfill

Dimensions (height x width x depth)	670mm (26.38") x 1080mm (42.52") x 300mm (11.81")
Weight	60 kg (132.28lbs)

[WWW.KV2AUDIO.COM](http://WWW.KV2AUDIO.COM)

---

# Step Beyond the Limitations of Line Array